

420.00 mm

145.00 mm

www.snailpower.net

User's Manual



SNAIL POWER

Enjoy Snail Sound, Touch Your Soul!

MODEL: CW90 7.1 SYSTEM

2026-08版

From Italy Snail Power

对折装订

210*145mm,双面印刷, 封面120g铜版纸, 过膜; 内页80克

CW90 7.1 SYSTEM

Warranty Policy and Customer Service Information

Thank you for purchasing SNAIL POWER products. If a product quality issue occurs within 12 months from the date of purchase, you are entitled to warranty service.

NOTES:

- 1. A valid proof of purchase must be issued by the seller when purchasing.
- 2. The warranty card and proof of purchase should be properly kept by the user and cannot be lost, Replacement copies will not be issued if lost.
- 3. If this product develops a malfunction due to non-user-induced causes, the user may bring it to the customer service center for repair during the warranty period by presenting the warranty card and proof of purchase.

Non-warranty Conditions:

During the user's operation, those that meet one of the following conditions are not covered by the warranty.

- 1.The warranty period has expired.
- 2. Damage caused by failure to use in accordance with the requirements in the user's instruction manual
- 3. Damage caused by misuse, improper handling, or unauthorized modification.
- 4. Failures caused by unauthorized disassembling, repair, and modification of products.
- 5. Damage caused by force majeure factors (such as floods, earthquakes, lightning, etc.).
- 6. No warranty card, invoice or warranty card does not match the invoice information.
- 7. The product wears out naturally.
- 8. Failure and damage caused by other non-product quality problems.

CW90 7.1 SYSTEM


1: Product features

- Premium top coat finish(Anti-fingerprint);
- 2. 75-inch high-fidelity speaker + passive radiators;
- Small size, high power;
- Adopting a waveguide structure to create sound that can turn corners;
- Fully sealed cabinet for a stunning music experience;
- All materials used comply with the ROHS standards;
- Ci custom installation;
- It delivers portable installation and ultimate experience for living room home theaters and professional conference systems;


2: Technical Parameters

Speaker Unit:1X2.75" Driver;
Frequency Response:65Hz-20KHz(In wall);
Power Max:90W RMS short-term;
Sensitivity:88dB/W/m;
Maximum Sound Pressure Level (SPL): 111dB;
Nominal Impedance:8Ω;
Input Voltage:AC100~240V;
Power Interface:Quick Connector;
Connection Method:5.8G Wireless Connection;
Product Dimensions:Φ105x100mm;
Cut out Dia:Φ90mm, Depth>100mm;
Product Net Weight:0.66Kg(single)

3: Standard Accessories

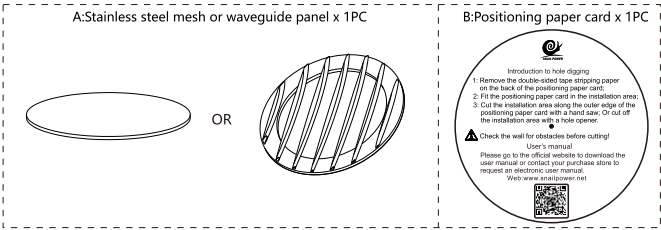


4: Finished product size drawing

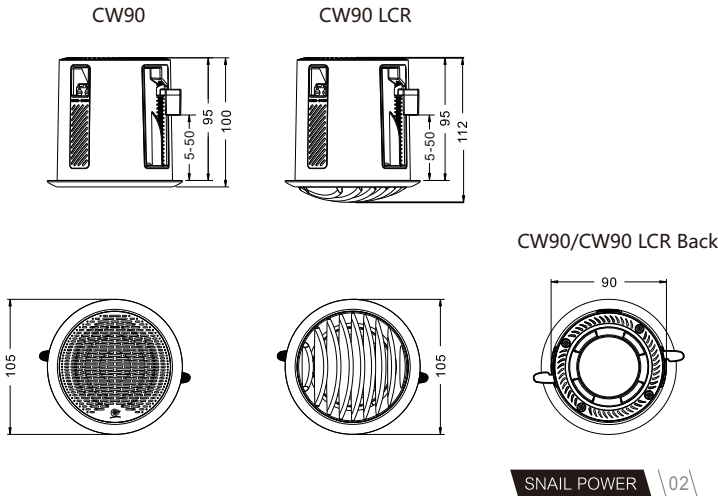


CW90 7.1 SYSTEM

5: Installation Instructions


A: Recessed installation method (concealed installation)




Stick the positioning paper card on the corresponding position of the ceiling.




Cut out this area with a blade or hole saw.
**Watch out for obstacles.




Thread the reserved power cable through the speaker quick connector.



Put the finished speaker into the ceiling hole, hold it with your hand, and then use a screwdriver or electric screwdriver to fix the speaker on the ceiling.***Please ensure proper tightening without any looseness.



Finally, install the iron mesh or waveguide panel into the speaker's groove, ensuring it is properly fitted and there is no loosening.



Installation completed.

CW90 7.1 SYSTEM


6: Instructions for Connection & Pairing

1: Pairing Speaker with Main Unit

- ① First, confirm the installation position of the speaker, then toggle the DIP switch on the side of the speaker to the correct setting according to the speaker position DIP table.

FL	0	1	0	0	0
FR	0	1	0	0	1
CEN	0	1	0	1	0
SL	0	1	1	0	0
SR	0	1	1	0	1

FL:Front Left
FR:Front Right
CEN:Center
SL:Surround Left
Sr:Surround Right




Example DIP setting:
Center Speaker

**Note: If you install a 7.1 system,add two more speakers: SL and SR.。

- ③ Power on the main unit. Long-press the  key on the remote control for 3 seconds to enter the main unit pairing mode.The main unit displays PAIR, indicating successful entry into pairing mode.



- ② Power on the speaker. Point the remote control toward the status indicator area on the speaker, then long-press the  key for 3 seconds to enter speaker pairing mode.Fast flashing status indicator: successfully entered pairing mode.Slow flashing status indicator: pairing failed, please re-pair.Steady-on status indicator: pairing succeeded.



- ④ After the speaker is successfully paired with the main unit, install the speaker at the pre-determined position. (Do not swap speaker positions arbitrarily)


CW90 7.1 SYSTEM

2: Speaker Restart Instructions

① Point the remote control toward the Status Indicator area of the speaker to be restarted, and long-press the  key for 3 seconds to restart the speaker.



② Insert a SIM eject tool or thin rod into the reset hole on the speaker panel, then gently press to restart the speaker.

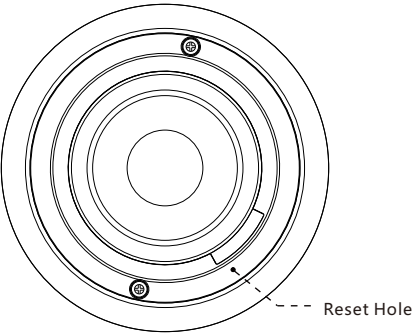

3: Speaker Position Adjustment Instructions


If you need to readjust the installation position of the speaker, first set the DIP switch according to the speaker position DIP table corresponding to the new installation position; restart the speaker, then re-pair it with the main unit via the remote control.

CW90 7.1 SYSTEM

7: Distribution diagram of speaker installation positions

- CW90LCR: ① ② ③
CW90: ④ ⑤ ⑥ ⑦
P10: ⑧

Instructions for Speaker Installation Locations:
A: front speaker ① ④ and center speaker ② installed above the screen.
B: rear speaker ① ⑤ placed above the left rear / right rear of the viewer
C: surround speaker ⑥ ⑦ placed above the left side / right side of the viewer
D: subwoofer ⑧ placed on the left or right side of the TV cabinet
Note: If you install a 5.1 system
There are no ⑥ and ⑦ speakers.

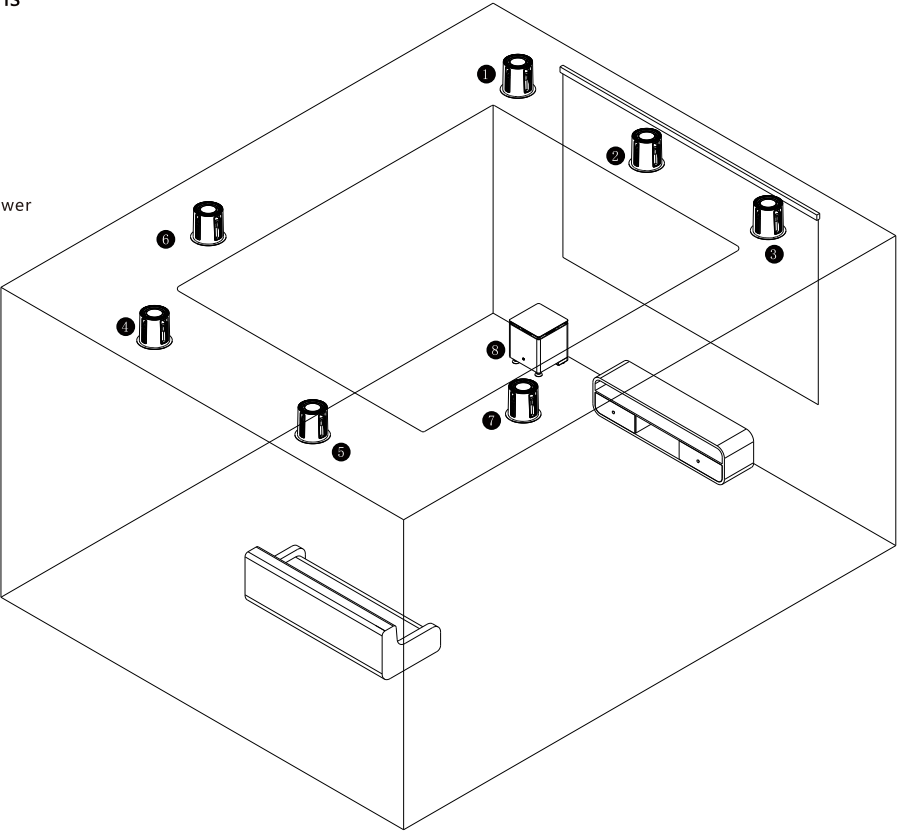

P10

8: Product features


- Top-grade matte surface (anti-fingerprint) + tempered glass;
- Active radiating subwoofer, featuring rich, natural, relaxed and majestic ultra-low frequencies with a strong sense of envelopment and powerful impact.
- Active integrated type with built-in amplifier;
- Active subwoofer;
- All materials used comply with the ROHS standard.

9：Technical parameters


Speaker unit: 10" Driver+ 10"Subwoofer passive unit;
Frequency response range: 25Hz-200Hz;
Amplifier output power: 1000 watts RMS short-term;
Sensitivity: 86±3dB/W/m(100Hz);
Recommended crossover point: 80~160Hz;
Input Method: 5.8G Wireless Connection;
Nominal impedance: 6Ω;
Signal-to-Noise Ratio(S/N): >86dB(100Hz A WEIGHTED);
Maximum Sound Pressure Level(@1m): 119dB;
Functional features: 0.5W low standby power consumption;
overheat shutdown protection; short
circuit and overload protectionPermanent
high-frequency protection; proprietary DSP module;
Power supply used: AC 100V-120V/220V-240V ;
Finished product size: 295(L)X295(W)X405(H)mm
Product net weight: 20Kg;
Product gross weight: 22Kg;

10：Standard accessories

Ⓐ power cord*1PC



Ⓑ RS232 connecting line*1PC




Ⓒ User Manual



P10

11: Front panel function description

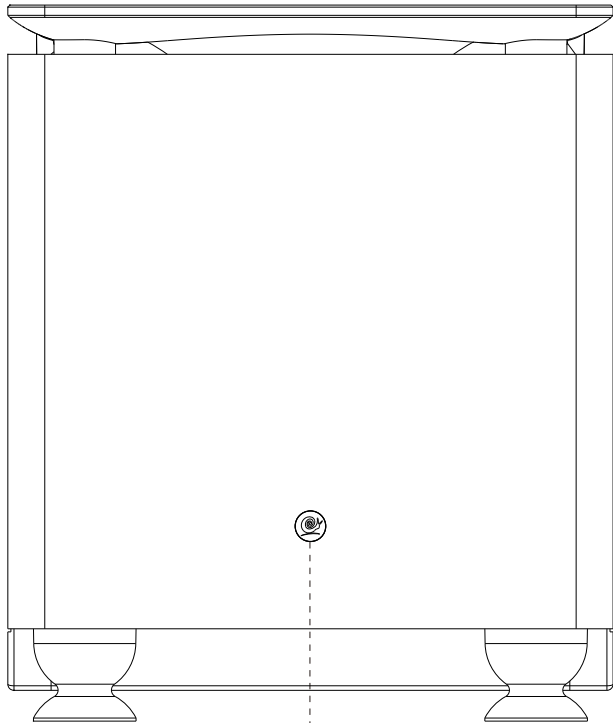

Power indicator light

Power Indicator LED


ON	BLUE	Detected audio input, triggered the power, in normal working mode.
STANDBY	RED	Waiting for an audio signal to trigger power-on, in standby mode.
OFF	None	No power input.

Power Auto/Always on

This subwoofer can be safely left with the main power switch on continuously. The subwoofer will turn itself on automatically when an audio signal is present. If no signal is present for approximately 15 mins, the unit will switch to standby mode (indicated by red power LED color).While in standby mode, your subwoofer will draw very minimal power.

P10

12： Back panel function Introduction

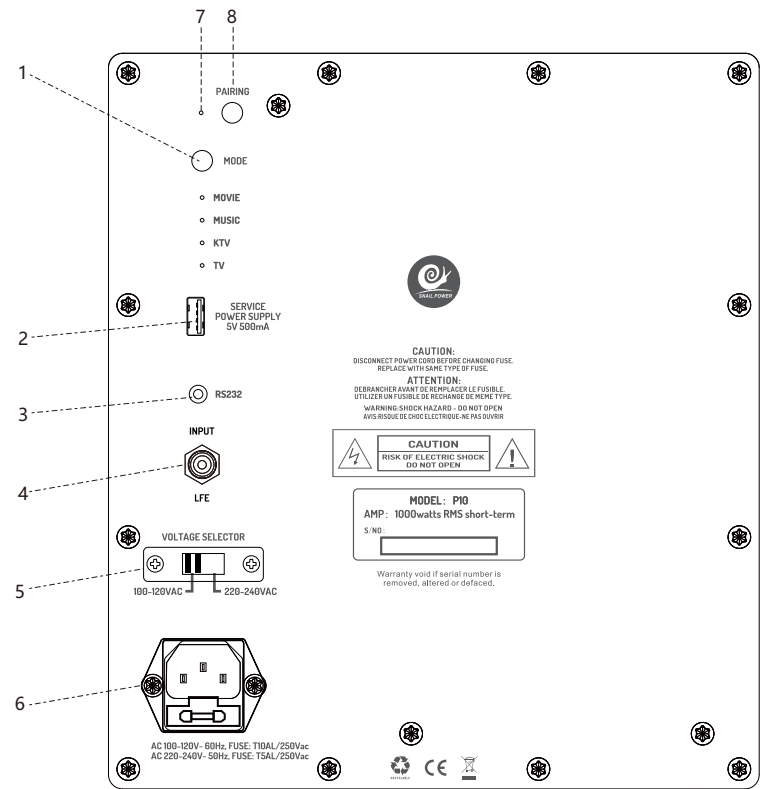

1: EQ MODE SWITCH

MOVIE: According to the setting of the living room, it is recommended to use in more than 20 square meters or unconfined space.

MUSIC: Suitable for pure music, hi-fi music, listening to music in a variety of environments.

KTV: Audio effects for karaoke venues designed to provide a high quality music and singing experience.

TV: For watching TV, news programs.

2: USB SOCKET

DSP Debugging Service or power supply 5V/500mA.

3: RS232 INPUT INTERFACE

The external device sends instructions to the subwoofer, and the subwoofer switches the corresponding EQ mode.

4: INPUT

RCA Input(2VP-P). DVD, CD, AV power amplifier SUB signal or audio output of other devices can be directly connected to the subwoofer INPUT.

5: VOLTAGE SELECTION SWITCH

This machine can operate in an environment of 100-120V or 220-240V. Before using the machine, please make sure the voltage switch is set to the correct position.

6: POWER INPUT SOCKET

AC100-120V~60Hz/AC220V-240V-50Hz;
Built-in fuse tube 2 PCS (T5AL/250V), size $\phi 5 \times 20 \text{mm}$

7: PAIRING INDICATOR LED


Steady on: The pairing is successful
Blinking slowly: The connection is disconnected
Quick blink: Waiting for pairing

8: PAIRING SWITCH

Press and hold this switch, and the indicator next to it will flash quickly to enter the pending pairing state.

P10


13: Finished dimension drawing

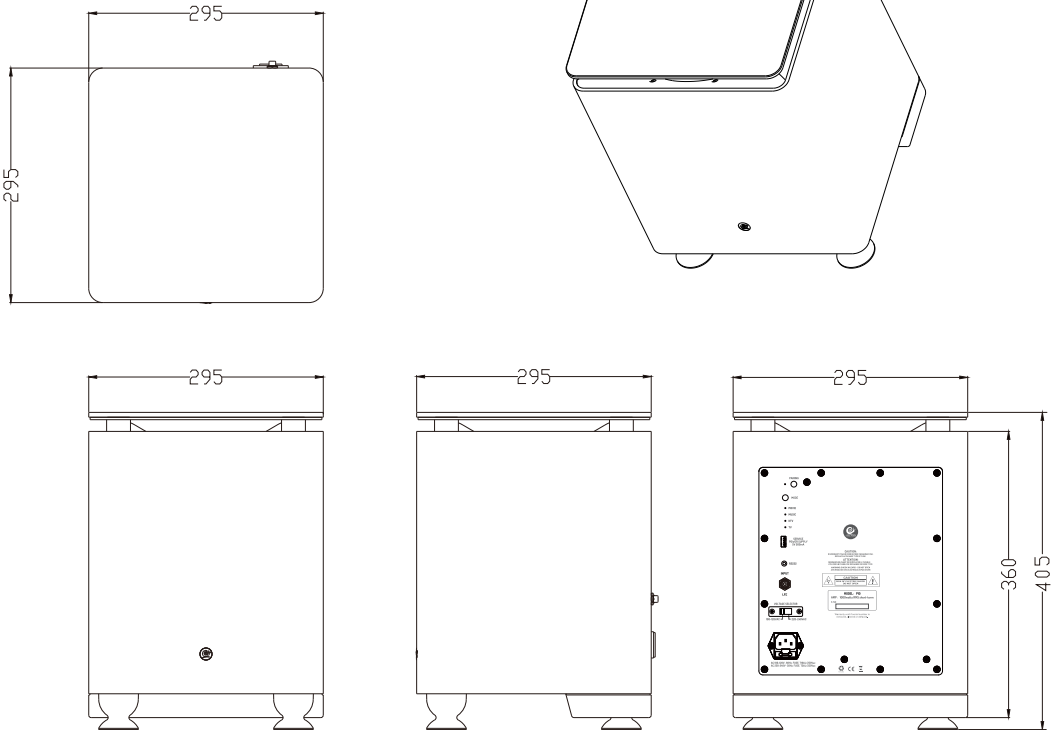

CW90 7.1 SYSTEM

14: Connection

P10 connects to the wireless host via 5.8G wireless. First, long press the PAIRING button on the rear panel of the subwoofer. The adjacent pairing indicator flashes rapidly to enter pairing standby mode. Then point the remote control toward the host, long press the  key for approximately 3 seconds. Release the button once the host displays PAIR; the host will automatically enter pairing mode. A steady indicator light on the speaker means pairing is successful. Continuous fast or slow flashing indicates pairing failure, and re-pairing is required.




15: Setup Home Theater System

Home Theater Speaker: The two front speakers can be placed on two side of TV screen located at ¼ section of the front wall. (as shown in the picture).The speaker is tilted slightly towards the listener. It is recommended to place the rear-surround speaker in a higher position behind the listener's head. If the back wall far from the listener's seat, could consider using floor stand. If the position of center speaker is too high or too low, tilt it slightly toward the listener's ear. The center speaker should be further away from the direct line of surround speaker's front side. Using AV amplifier's automatic testing function for calibration and adjustment.

Super Subwoofer: human ear cannot distinguish the direction of the bass, the Super Sub could be placed freely. The distance of the Sub from the wall will affect the bass performance. Putting it in the corner might enhance the bass but may reduce the clarity. If you use two super Sub same time, it will enhance the performance of your home theater system.

16: Multi-channel Placement

DolbyLabs, DTS, and THX provide 5.1 and 7.1 layouts. The exact structure of these systems depends on the performance of your processor, we will also provide some experimental results for your reference. With 5.1 and 7.1 system, the position of listener should not be too close to the rear wall. To fully perform the benefits of these systems, it is important to make sure that signals from all speakers reach DolbyLabs' multi-channel home theater system layout simultaneously.

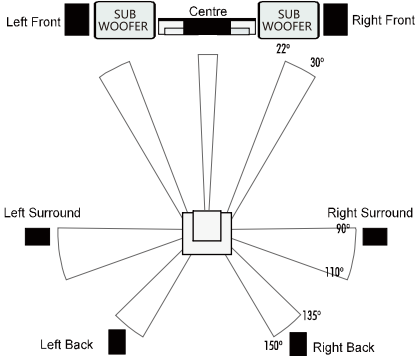

CW90 7.1 SYSTEM

17: Subwoofer installation


Using Two P10

When using two P10, try placement near the front corners of the room, or at the center points of opposing walls as shown at right.

Experimentation with subwoofer and listener placement is recommended to achieve the best results - the benefits can be substantial.

High-resolution measurements and professional system calibration are recommended for the best possible results & system performance.

Recommended subwoofer Placement Options for Two P10

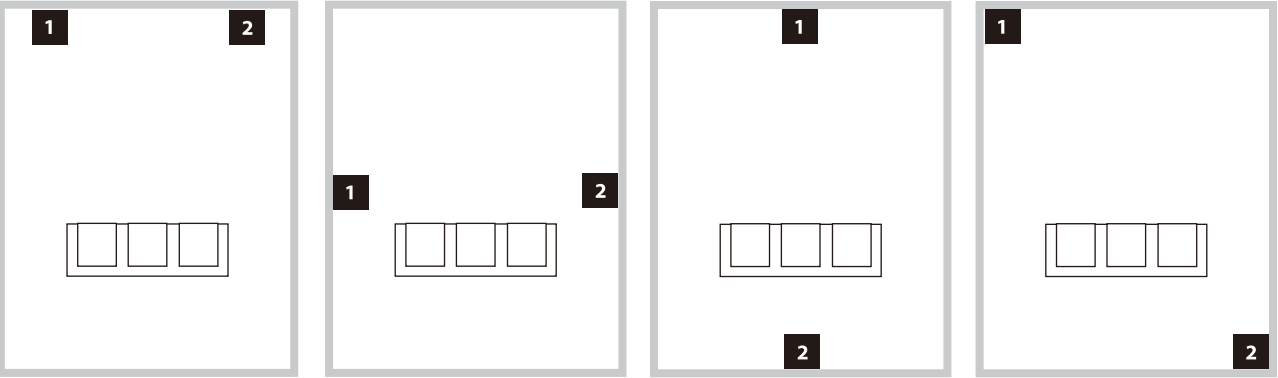

Using Three or Four P10


Research indicates that the smoothest bass response for a large listening area can be achieved using four subwoofers, placing one at the midpoint of each of the four walls (although using two or three subwoofers can be almost as good).

Experimentation with subwoofer and listener placement is recommended to achieve the best results - the benefits can be substantial.


High-resolution measurements and professional system calibration are recommended for the best possible results & system performance.

CW90 7.1 SYSTEM

Recommended subwoofer Placement Options for Three P10

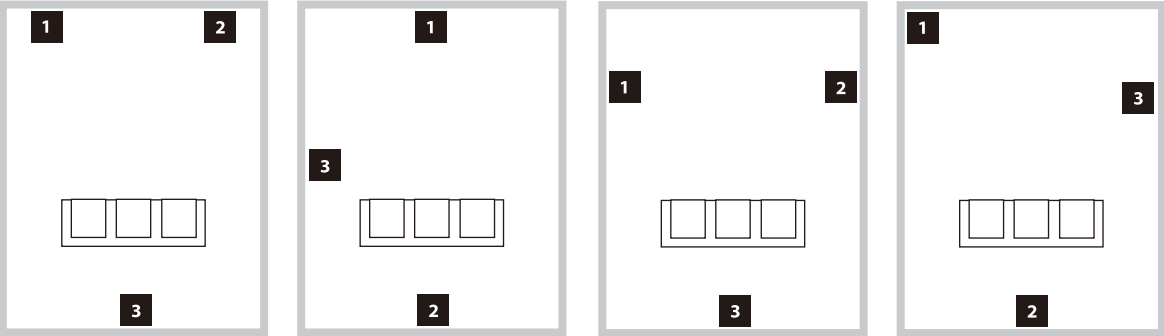


Recommended subwoofer Placement Options for Four P10

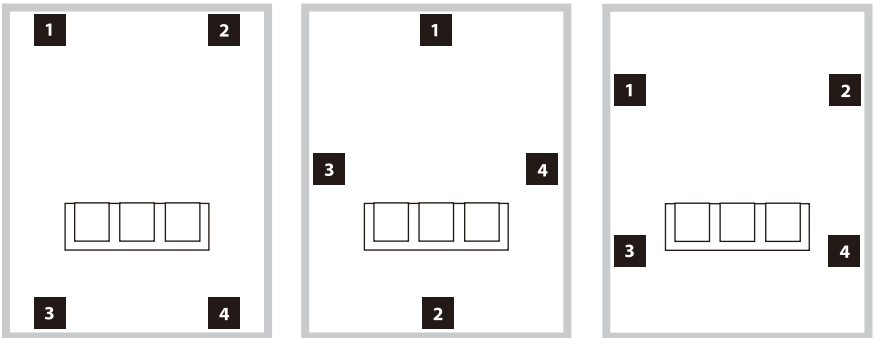

CW90 7.1 SYSTEM

IMPORTANT SAFETY INFORMATION

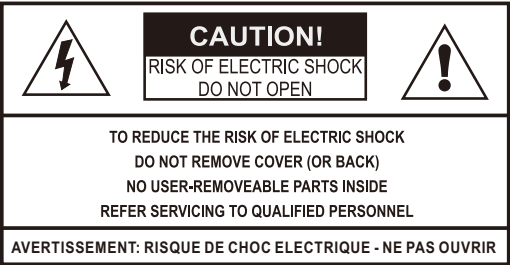

 This symbol indicates that there are important operating and maintenance instructions in the literature accompanying this unit.

 This symbol indicates that dangerous voltage constituting a risk of electric shock is present within this unit.

Read these instructions.
Keep these instructions.
Heed all warnings.
Follow all instructions.
Do not use this apparatus near water.
Clean only with a dry cloth.
Do not block any ventilation openings.
Install in accordance with the manufacturer's instructions.
Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.

Do not defeat the safety purpose of the polarized or grounding plug. A polarized plug has two blades with one wider than the other. A grounding plug has two blades and a third grounding prong. The wide blade or the third prong is provided for your safety. If the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet. Protect the power cord from being walked on or pinched particularly at plugs, convenience receptacles, and the point where they exit from the apparatus. Only use attachments/accessories specified by the manufacturer.

Unplug the apparatus during lightning storms or when unused for long periods of time. When the product is damaged in any of the following ways, free repair service will not be provided: For example, damage caused by liquid ingress, foreign objects entering the device, exposure to rain or moisture, abnormal operation, or the product being dropped.

CAUTION: These servicing instructions are for use by qualified service personnel only. To reduce the risk of electric shock, do not perform any servicing other than that contained in the operating instructions unless you are qualified to do so. No naked flame sources, such as lighted candles, should be placed on the apparatus.

WARNING: When the mains plug or appliance coupler is used as the disconnect device, it shall remain readily operable.

CW90 7.1 SYSTEM



Correct disposal of this product.
This marking indicates that this product should not be disposed of with other household waste throughout the EU.
To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly to promote the sustainable reuse of material resources.
To return your used device, please use the return and collection systems or contact the retailer where the product was purchased. They can take this product for environmentally safe recycling.



This equipment is a class II or double insulated electrical appliance. It has been designed in such a way that it does not require a safety connection to electrical earth.

RoHS Hazardous Substances Declaration

Hazardous substance	Circuit board	Wire	Enclosure	Accessories
Pb	×	×	×	×
Hg	×	×	×	×
Cd	×	×	×	×
Cr(VI)	×	×	×	×
PBB	×	×	×	×
PBDE	×	×	×	×

CW90 7.1 SYSTEM

Warranty Card

We are committed to providing reliable support and service throughout your product experience.

Your positive feedback is greatly appreciated and helps us continue to improve.



Authenticity Guarantee



Invoice Provided

After-Sales Service

✓7-day replacement

1.Product quality issue.
2.Damage caused during shipping.

✓12-month warranty

1.Valid within the warranty period.

!

CAUTIONS

The following conditions are not covered by the 7-day replacement service:

1. Product quality problems caused by user-caused damage.
2. Replacement requests that do not meet the policy requirements.

The following conditions are not covered by the 12-month warranty:

1.The warranty period has expired;
2.damage caused by misuse or improper handling.

Important Notes:

1.We do not accept freight collect shipments or postage-due returns.

2.Please ensure that the product is intact before returning it. If you are not satisfied with the product, please return it with all accessories and packaging.

Thank you for your understanding and cooperation.

If you have any questions, please contact us promptly.
We will assist you as soon as possible.

Website: www.snailpower.net

After-Sales Service Registration Form

Customer information

Name: _____ Telephone: _____

E-mail: _____ Postal code: _____

Address: _____

Product information

Model: _____ Product Barcode: _____

Finish/Color: _____ Serial No.: _____

Order No.: _____ Delivery No.: _____

Dealer information

Dealer Name: _____Telephone: _____

Address: _____

Reason for Return: _____

Problem Description: _____

Others: _____

Service Request:

☐ Return ☐ Replacement



保修政策和客户服务信息

感谢您购买 SNAIL POWER 产品。如果自购买之日起12个月内出现产品质量问题，您可以享受公司的保修服务。

注意：

- 1.购买时卖方必须出具有效的购买证明。
- 2.保修卡和购买凭证由用户妥善保管，不得丢失，丢失后不得重复发放。
- 3.如果本产品出现非人为原因造成的故障，用户可使用保修卡和购买证书在保修期内到客户服务中心进行维修。

非保修情况：

在用户操作过程中，满足以下条件之一且不在保修范围内的设备。

- 1.超过保修期。
- 2.未按照用户使用说明书的要求使用而造成的损坏。
- 3.人为因素造成的损害。
- 4.未经授权的产品拆卸、维修和修改导致的故障。
- 5.不可抗力因素（如洪水、地震、雷电等）造成的损害
- 6.无保修卡、发票或保修卡与发票信息不匹配。
- 7.产品自然磨损。
- 8.其他非产品质量问题造成的故障和损坏。

CW90 7.1 SYSTEM


一：产品特性

- 表面高级面漆(防指纹);
- 2.75英寸高保真喇叭+无源辐射器;
- 小体积,大功率;
- 采用导波的结构,创造会转弯的声音;
- 全密封箱体,震撼的音乐享受;
- 所用的材料均符合ROHS标准;
- Ci定制安装;
- 为客厅影院,专业会议系统带来更便携的安装及极致体验;


二：技术参数

喇叭单元:	1X2.75" Driver;
频响范围:	65Hz-20KHz(In wall);
输入功率:	90W RMS short-term;
灵 敏 度:	88dB/W/m;
最大声压:	111dB;
标称阻抗:	8Ω;
输入电压:	AC 100~240V;
电源接口:	快速连接器；
连接方式:	5.8G无线连接；
产品尺寸:	Φ105x100mm;
开孔尺寸:	Φ90mm，深度>100mm;
产品净重:	0. 66 kg(单只)

三：标配附件

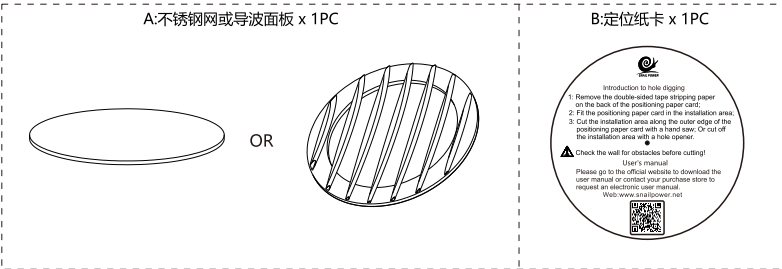


四：成品尺寸图

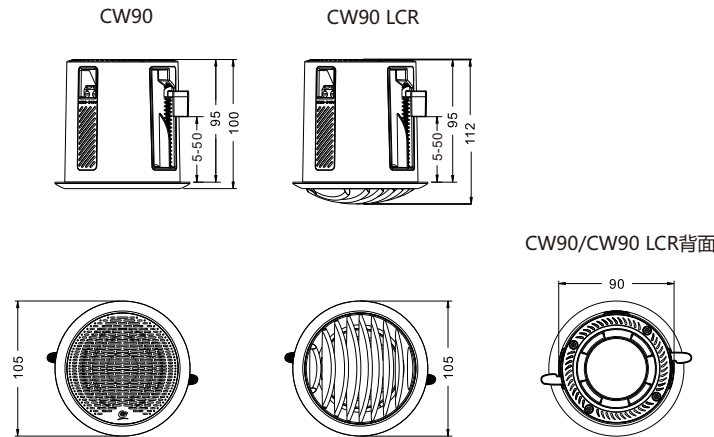


CW90 7.1 SYSTEM

五：安装说明


A：嵌入安装方式（暗装）




将定位纸卡粘贴在天花板上相应位置




用刀片或取孔器将此区域割除。
**注意障碍物




将预留的电源线穿入音箱快速连接器里



把成品音箱从天花孔内装入,用手托住然后
后用螺丝刀或电动启子将音箱固定在天花板上.***注意锁付到位,无松动情形.



最后将铁网或导波面板装入音箱槽沟内,确定装配到位无松脱现象.



安装完成

CW90 7.1 SYSTEM

六：连接配对说明


1：音箱与主机配对

- ① 首先确定好音箱的安装位置，将音箱侧面的拨码开关按音箱位置参照拨码表拨到正确状态

FL	0	1	0	0	0
FR	0	1	0	0	1
CEN	0	1	0	1	0
SL	0	1	1	0	0
SR	0	1	1	0	1


FL：前置左声道
FR：前置右声道
CEN：中置声道
SL：环绕左声道
SR：环绕右声道

**注：如您安装7.1系统，
则再增加SL和SR两个音箱。



示例拨码为中置声道01010

- ② 将音箱通电，将遥控器对准音箱的状态灯区域，长按遥控器的 键三秒；
音箱状态灯快闪，即进入待配对模式；
状态灯慢闪，配对失败，需重新配对；
状态灯常亮即配对成功。



- ③ 将主机开机，长按三秒遥控器的 键3秒，主机显示PAIR即进入配对模式。



- ④ 音箱与主机配对成功后，按照预先确定好的位置安装音箱（请勿随意调换音箱位置）


CW90 7.1 SYSTEM

2：音箱重启说明

- ① 对准音箱状态灯区域，长按遥控器的 键三秒，重启音箱



- ② 使用卡针或细棒伸入音箱面板上的重启按键孔，轻戳一下重启音箱

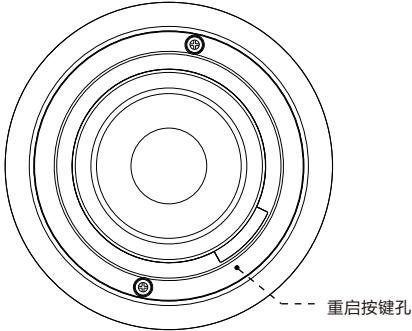

3：音箱调位说明

若音箱需要重新调整安装位置，先将拨码开关按安装位置参照拨码表拨到调整安装位置后的状态；重启音箱，再通过遥控器重新与主机配对。

CW90 7.1 SYSTEM

七：音箱安装位置分布图

- CW90LCR: ① ② ③
CW90: ④ ⑤ ⑥ ⑦
P10: ⑧

音箱安装位置说明:


A: 前置音箱 ① ④ 和中置音箱 ② 安装在屏幕上方。

B: 后置音箱 ⑤ ⑥ 放在视听者的左后上方/右后上方。

C: 环绕音箱 ⑥ ⑦ 放在视听者的左侧上方/右侧上方。

D: 低音炮 ⑧ 放在电视柜的左侧或右侧。

注意:如果你安装5.1系统,
没有 ⑥ 和 ⑦ 音箱。

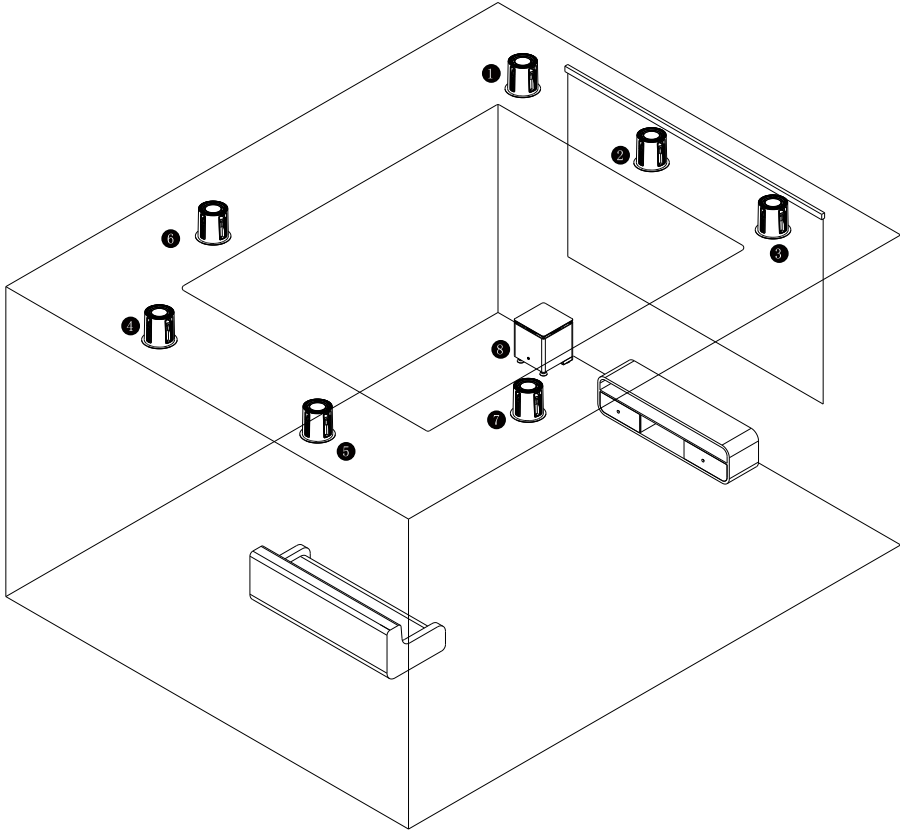

P10

八：产品特性


- 表面顶级磨砂面(防指纹)+钢化玻璃;
- 主动辐射式超低音箱,丰满自然、宽松磅礴、包围感强烈的超低频震撼感;
- 有源一体化,内置放大器;
- 有源低音炮;
- 所用的材料均符合ROHS标准;

九：技术参数


喇叭单元:	10" Driver+10"超低音被动单元;
频响范围:	25Hz-200Hz;
功放输出功率:	1000 watts RMS short-term;
灵 敏 度:	86±3dB/W/m(100Hz);
建议分频点:	80~160Hz;
输入方式:	5.8G无线输入;
标称阻抗:	6Ω;
信噪比(S/N):	>86dB(100Hz A WEIGHTED);
最大声压(@1m):	119dB;
功能特性:	0.5W低待机功耗;过热关机保护;短路和过载保护; 永久高频保护;专有的DSP模块;
使用电源:	AC 100-120V~60Hz/AC 220-240V~50Hz;
成品尺寸:	295(L)X295(W)X405(H)mm
产品净重:	20Kg;
产品毛重:	22Kg;

十：标配附件

Ⓐ 电源线 *1根



Ⓑ RS232 连接线 * 1根




Ⓒ 说明书



P10

十一：前面板功能说明

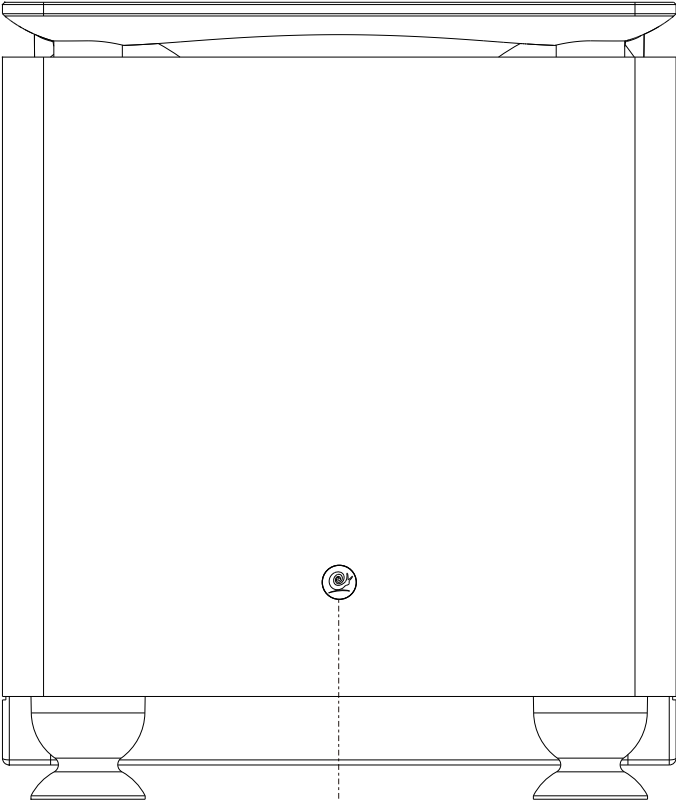

1:电源指示灯

开机	蓝色	检测到音频信号输入，触发开机，处于正常工作状态
待机	红色	等待音频信号触发开机，处于待机状态
关闭	无	无电源输入


2:电源(自动/始终开启)

本超低音音箱可以持续安全工作，如果有音频信号输入时，超低音音箱会自动开启。如果15分钟左右都没有信号输入，超低音音箱会自动切换到待机模式（LED显红灯）。在待机模式下，您的超低音音箱会消耗最小的功率。

电源指示灯

P10

十二：后面板功能说明

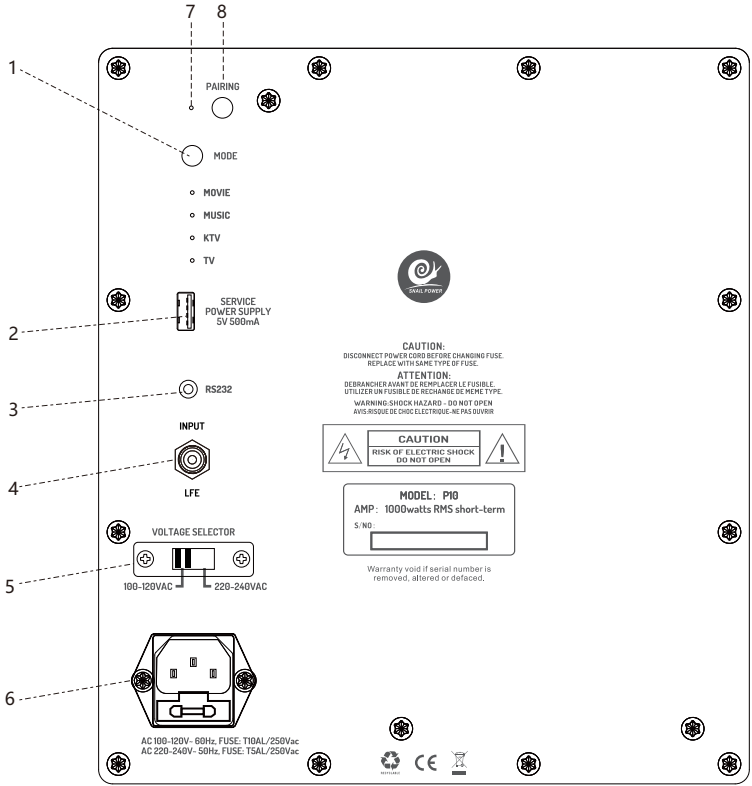

1: EQ模式切换

- MOVIE: 按客厅使用场景设置，建议在20平方以上或非密闭空间使用。
- MUSIC: 适合纯音乐,高保真音乐，在各种环境中倾听音乐。
- KTV: 用于卡拉OK场所的音频效果，旨在提供高质量的音乐和歌唱体验。
- TV: 用于观看电视，新闻节目。

2: USB插座

DSP调试服务或电源供应5V/500mA

3: RS232输入接口

外部设备发送指令给低音炮,低音炮进行相对应EQ模式切换。

4: INPUT

RCA线路输入(2VP-P)，DVD，CD，AV功放SUB信号或其它设备音源输出，可直接连接本产品输入端INPUT接口。

5: 电压选择开关

本机可在100-120V或220-240V的环境中运行。
在使用机器之前，请确保电压开关拨到正确位置。

6: 电源输入插座，AC 100-120V~60Hz/AC 220-240V~50Hz;

内置保险丝管2PCS，规格T5AL/250V，尺寸φ5x20mm。

7: 配对指示灯


- 常亮：配对成功
- 慢闪：断开连接
- 快闪：等待配对

8: 配对开关

长按开关，旁边的指示灯快闪，进入待配对状态

P10


十三：外观尺寸图

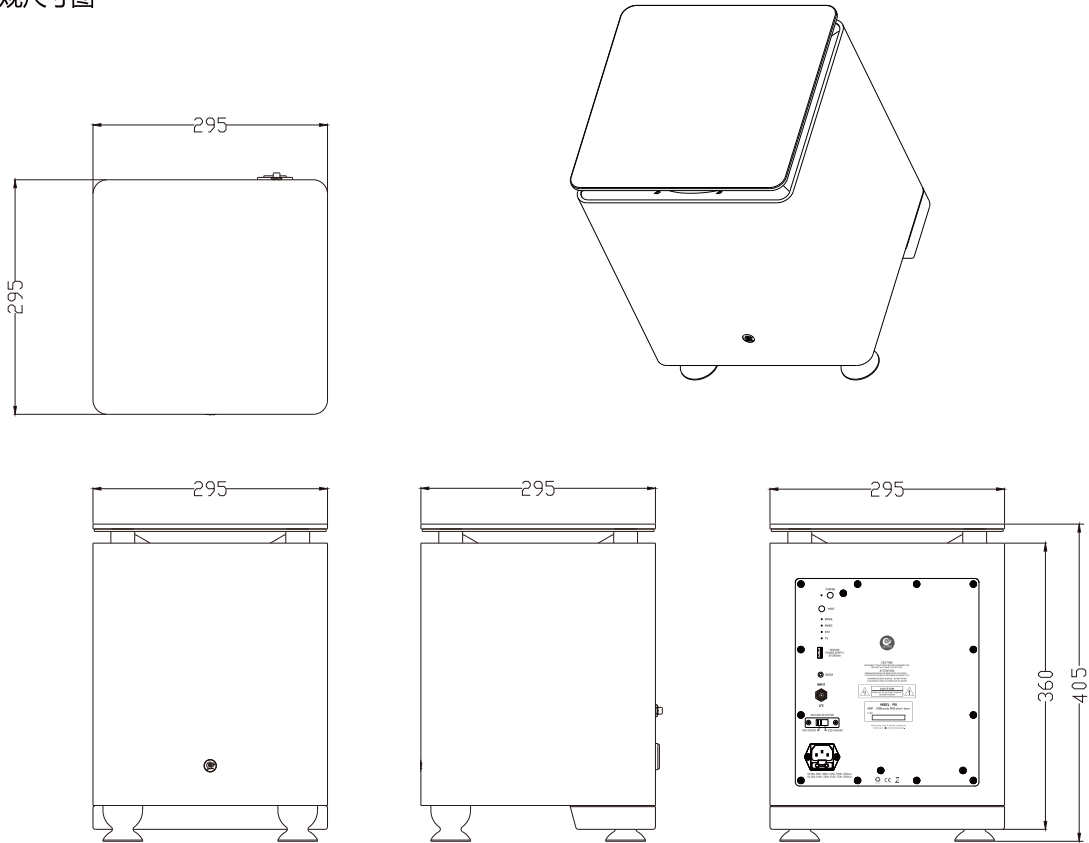

P10

十四：连接

P10与无线主机通过5.8G无线连接，首先长按超低音箱后板的PAIRING按键，旁边的配对指示灯快闪即进入待配对模式；然后遥控器对准主机，长按  键约3秒，主机显示PAIR就可以松开，自动进入配对模式。如果音箱上的指示灯常亮，表示配对成功；长时间快闪或慢闪表示配对失败，需重新配对。

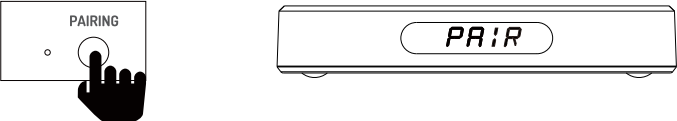

十五：家庭影院系统的设置

家庭影院音箱：前置主音箱可放在电视屏幕的两侧，音箱的位置约在前方的墙面1/4处（如图所示）。音箱稍微向听者位置倾斜摆放。建议将后环绕音箱放在听者头部后方的一个较高位置。如果后墙和侧墙离听者座位较远，可考虑将音箱架在落地支架上。如果中置音箱过高或过低，将其稍微向听者耳朵处倾斜。中置音箱离环绕音箱的前面板所在直线应尽可能远。调试应该使用AV功放的自动测试的功能进行校正和调整。

超重低音音箱：由于人耳无法分辨出较低沉的低音发出的方向，所以超重低音音箱可以自由摆放位置。音箱离墙壁的距离会影响低音效果。将其放在墙角会增强低音但可能会使清晰度减弱。如果同时使用两个超重低音音箱，会增强家庭影院系统的演示效果。


十六：多通道系统的摆放

DolbyLabs，DTS和THX提供了5.1和7.1布局。这些系统的精确结构取决于您的处理器的性能，但我们会提供一些试验结果，以供您参考。

在5.1和7.1布局中，听者位置离后方墙壁不要太近。

为充分实现这些系统的优点，应尽量使所有音箱发出的信号同时到达听

DolbyLabs的多声道家庭影院系统摆放方案。

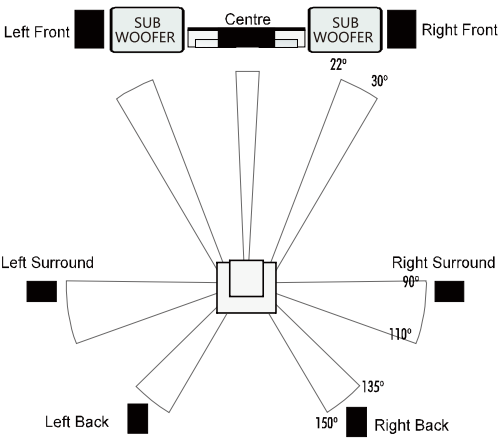

P10

十七：低音炮音箱的安放


当使用两个低音炮

当使用两个低音炮时，试着放置在房间的前角附近，对角在房间的中心，或在相对的墙壁的中心点，如右边所示。

建议使用低音炮和听筒进行试验，以获得最佳效果——好处可以是实质性的。

为了获得最佳的结果和系统性能，建议进行高分辨率测量和专业的系统校准。

使用两个低音炮的推荐低音炮放置选择

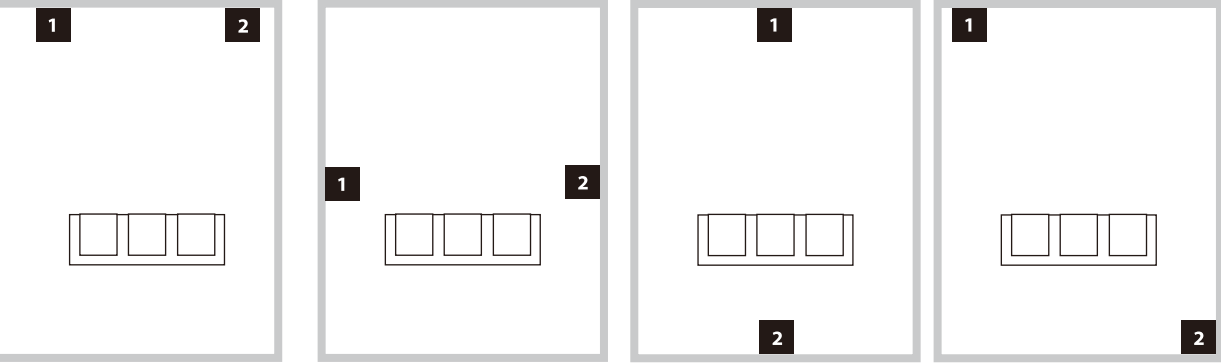

当使用三个或者四个低音炮


研究表明，对于一个大的听区，使用四个低音炮可以达到最平稳的低音响应，将一个低音炮放置在四面墙的中间位置(尽管使用两个或三个低音炮几乎可以达到同样的效果)。

建议使用低音炮和听筒进行试验，以获得最佳效果——好处可以是实质性的。


为了获得最佳的结果和系统性能，建议进行高分辨率测量和专业的系统校准。

P10

使用三个低音炮的推荐低音炮放置选项

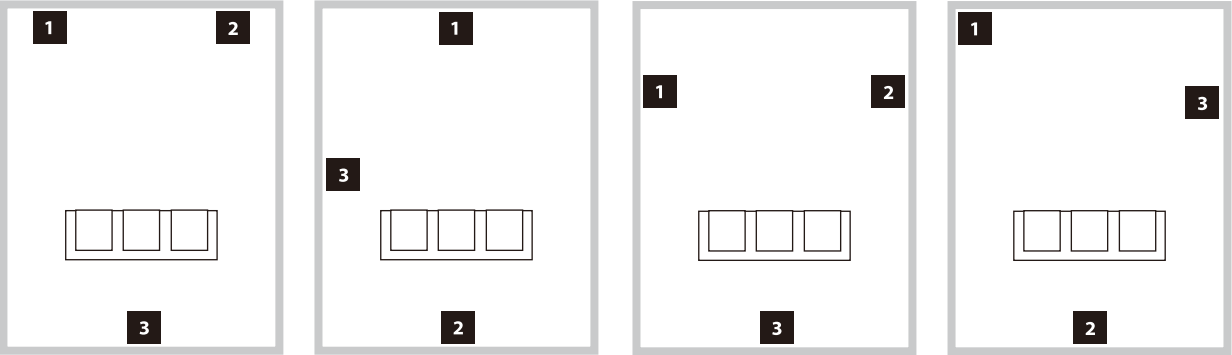

使用四个低音炮的推荐低音炮放置选项

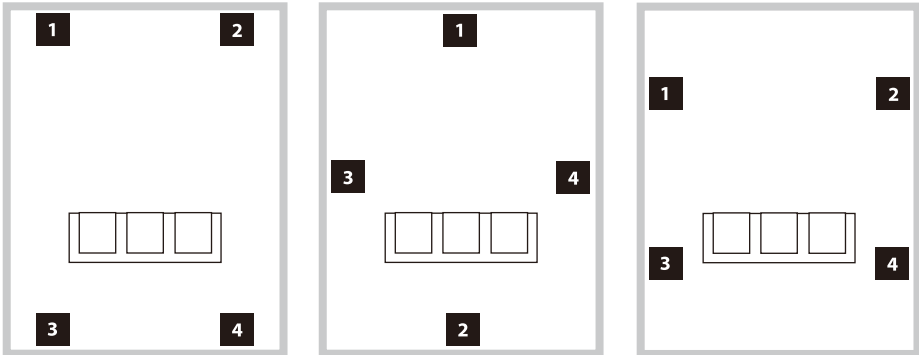

重要的安全提示



警告！

小心触电
请勿打开



为减少触电的风险，请勿私自拆开面板，机身内部无任何用户可自行更换的零部件，如果出现异常，请咨询专业人员。



此标志表示包装盒内附带有重要的操作指引和维修说明书。



此标志表示机身存在的高电压有可能引起触电风险。

- 请阅读此说明书。
- 请保留此说明书。
- 请留意所有的警告标示。
- 请遵循所有的操作说明。
- 请勿将本产品靠近水源。
- 仅能使用干布清洁机身。
- 请勿阻塞各通风口。
- 请按生产商的说明书进行安装操作。

请勿安装在任何热源附近，比如散热器、热调温器、火炉及其他散热设备(包括功放)。

请勿损坏带极性插头或接地型插头的安全性能。带极性插头一般有两个宽度不一的插片而接地型插头除这两个插片外还带一个接地插片，其中稍宽点的插片及接地插片是为了保障用户安全而提供。如果产品上的插头与用户插座不匹配，请咨询专业人士更换合适的插座。保护好电源线，避免被踩踏或碾压，尤其是插头、便捷式插座及设备输出端口处。

仅使用厂商所指定的附件或零件。

雷电天气或长时间不使用该产品时，请将电源插头拔出。

所有的维修服务，请咨询专业的维修人员。

当产品出现以下任何形式的损坏时不可以要求免费维修：比如液体溅入或设备内掉入异物、产品淋雨受潮、非正常操作或产品被摔落等情况损坏的。

警告:为减少火灾及电击的危险，请勿将产品淋雨受潮。产品不能够被溅湿，请勿将任何装有液体的容器如花瓶放在本产品上方。

请勿将任何明火放置于产品上面，如蜡烛。

警告:电源插头被作为本产品的断电装置，请保持插头能进行方便操作。



该标志表明本产品报废后应进行合理的处置且不能与生活垃圾一同处理。为了防止对环境及人体健康可能造成的危害，可对该产品进行合理回收以促进材料的可持续使用。如果要退回该产品，应通过正规的回收渠道进行回收或联系此产品的经销商，他们可对其进行无公害的安全回收。



该产品已符合II类设备的安全要求，电源连接时不需要接地。

RoHS有害物质管理

有毒&有害物质	电路板	电线	箱体	附件
铅(Pb)	×	×	×	×
汞(Hg)	×	×	×	×
镉(Cd)	×	×	×	×
六价铬(Cr(VI))	×	×	×	×
多溴联苯(PBB)	×	×	×	×
多溴联苯醚(PBDE)	×	×	×	×

保修卡

希望我们的真诚服务能够陪伴您一生。
您的反馈是我们进步的最大动力!



正品保障



提供发票

售后服务

✓ 7天包换

- 1.商品质量问题!
- 2.运输过程中造成损坏!

✓ 12个月保修

- 1.确定在保修时效之内!

! 注意事项

① 以下情况,不享受7天包换服务:

- 1.人为因素造成产品质量问题!
- 2.因个人主观原因提出的不符合政策要求的换货申请!

② 以下情况,不享受12个月保修服务:

- 1.保修期已过!
- 2.人为损坏或因使用不当造成的问题!

温馨提示:

- 1.拒收货到付款或到付件。
- 2.办理退换货前, 请确保产品完好。如不满意需退换, 请将产品及全部配件、包装一并退回。

首先真诚的向您道歉,无论任何原因让您需要退换货,我们都致以万分歉意!
如果您有任何问题,请及时与我们沟通,我们都尽快为您解决!

官网: www.snailpower.net

售后服务登记表

用户信息

姓 名: _____ 联系电话: _____
电子邮件: _____ 邮政编码: _____
家庭地址: _____

产品信息

机种型号: _____ 产品条码: _____
表面处理: _____ 序 列 号: _____
订购单号: _____ 发货单号: _____

经销商信息

销售商名称: _____ 联系电话: _____
地 址: _____

退换原因: _____
问题说明: _____
其他说明: _____
退换要求: ☐ 退货 ☐ 换货

